

Type code for standard program

	A10V	O			/	31		-	V					
01	02	03	04	05		06	07		08	09	10	11	12	13

Version

18 28 45 71 100 140

	Standard version (without symbol)	●	●	●	●	●	●	
01	HFA, HFB, HFC hydraulic fluid (except for Skydrol)	-	●	●	●	●	●	E
	High-speed version	-	-	●	●	●	●	H

Axial piston unit

02	Swashplate design, variable, nominal pressure 280 bar, maximum pressure 350 bar	A10VS
----	---	--------------

Operation mode

03	Pump, open circuit	O
----	--------------------	----------

Size (NG)

04	Geometric displacement, see table of values on pages 6 and 7	18	28	45	71	100	140
----	--	-----------	-----------	-----------	-----------	------------	------------

Control device

	Two-point control, directly operated	●	●	●	●	●	●	DG
	Pressure control	●	●	●	●	●	●	DR
	with flow control, hydraulic							
	X-T open	●	●	●	●	●	●	DFR
	X-T closed	●	●	●	●	●	●	DFR1
	with swivel angle control, electric	-	●	●	●	●	●	FE1 ¹⁾
05	pressure and swivel-angle control, electric	●	●	●	●	●	●	DFE1 ¹⁾
	with pressure cut-off, remotely operated							
	hydraulic	●	●	●	●	●	●	DRG
	electrical negative characteristic	12V	●	●	●	●	●	ED71
		24V	●	●	●	●	●	ED72
	positive characteristic	12V	●	●	●	●	●	ER71 ²⁾
		24V	●	●	●	●	●	ER72 ²⁾
	Pressure, flow and power control	-	●	●	●	●	●	DFLR

Series

06	Series 3, Index 1	31
----	-------------------	-----------

Direction of rotation

07	Viewed on drive shaft	clockwise	R
		counter clockwise	L

Seals

08	FKM (fluor-caoutchouc)	V
----	------------------------	----------

1) See RE 30030

2) The following must be taken into account during project planning:

Excessive current levels ($I > 1200$ mA with 12 V or $I > 600$ mA with 24 V) to the ER solenoid can result in undesired increase of pressure which can lead to pump or system damage:

- Use I_{max} current limiter solenoids.

- A sandwich plate pressure reducing valve can be used to protect the pump in the event of overflow.

● = available

○ = on request

- = not available

Type code for standard program

	A10V	O			/	31		-	V					
01	02	03	04	05		06	07		08	09	10	11	12	13
Drive shaft														
09	Splined shaft	standard shaft				●	●	●	●	●	●	●	S	
	ANSI B92.1a	similar to shaft "S" however for higher input torque				●	●	●	●	-	-	-	R	
	Parallel keyed shaft	not for through drive				●	●	●	●	●	●	●	P	
Mounting flange														
10	ISO 3019-2	2-hole				●	●	●	●	●	-	-	A	
		4-hole				-	-	-	-	-	-	●	B	
Service line port														
11	SAE flange ports on opposite side, metric fastening thread					●	●	●	-	●	●	●	12	
						-	-	-	●	-	-	-	42	
Through drive														
12	without through drive					●	●	●	●	●	●	●	N00	
	Flange ISO 3019-1	coupling for splined shaft ¹⁾												
	Diameter	diameter												
	82-2 (A)	5/8 in 9T 16/32DP				●	●	●	●	●	●	●	K01	
		3/4 in 11T 16/32DP				●	●	●	●	●	●	●	K52	
	101-2 (B)	7/8 in 13T 16/32DP				-	●	●	●	●	●	●	K68	
		1 in 15T 16/32DP				-	-	●	●	●	●	●	K04	
	127-2 (C)	1 1/4 in 14T 12/24DP				-	-	-	●	●	●	●	K07	
		1 1/2 in 17T 12/24DP				-	-	-	-	●	●	●	K24	
	152-4 (D)	1 3/4 in 13T 8/16DP				-	-	-	-	-	-	●	K17	
	Ø 63, metric 4-hole	shaft key Ø 25				-	●	●	●	●	●	●	K57	
	Flange ISO 3019-2													
	Diameter													
	80, 2-hole	3/4 in 11T 16/32DP				●	●	●	●	●	●	●	KB2	
	100, 2-hole	7/8 in 13T 16/32DP				-	●	●	●	●	●	●	KB3	
		1 in 15T 16/32DP				-	-	●	●	●	●	●	KB4	
	125, 2-hole	1 1/4 in 14T 12/24DP				-	-	-	●	●	●	●	KB5	
		1 1/2 in 17T 12/24DP				-	-	-	-	●	●	●	KB6	
	180, 4-hole	1 3/4 in 13T 8/16DP				-	-	-	-	-	-	●	KB7	
Connectors for solenoids²⁾														
13	HIRSCHMANN connector – without suppressor diode					●	●	●	●	●	●	●	H	

1) Coupling for splined shaft as per ANSI B92.1a

2) Connectors for other electric components can deviate.

● = available

○ = on request

- = not available

Technical data, standard unit

Table of values (theoretical values, without efficiencies and tolerances: values rounded)

Size	NG		18	28	45	71	100	140
Geometrical displacement per revolution		V_g max cm ³	18	28	45	71	100	140
Speed ¹⁾								
maximum at V_g max	n_{nom}	rpm	3300	3000	2600	2200	2000	1800
maximum at $V_g < V_g$ max	$n_{max\ perm}$	rpm	3900	3600	3100	2600	2400	2100
Flow								
at n_{nom} and V_g max	q_v max	l/min	59	84	117	156	200	252
at $n_E = 1500$ rpm and V_g max	q_{vE} max	l/min	27	42	68	107	150	210
Power at $\Delta p = 280$ bar								
at n_{nom} , V_g max	P_{max}	kW	30	39	55	73	93	118
at $n_E = 1500$ rpm and V_g max	P_E max	kW	12.6	20	32	50	70	98
Torque								
at V_g max and	$\Delta p = 280$ bar	T_{max}	Nm	80	125	200	316	445
	$\Delta p = 100$ bar	T	Nm	30	45	72	113	159
Rotary stiffness, drive shaft	S	c	Nm/rad	11087	22317	37500	71884	121142
	R	c	Nm/rad	14850	26360	41025	76545	–
	P	c	Nm/rad	13158	25656	41232	80627	132335
Moment of inertial rotary group	J_{TW}	kgm ²	0.00093	0.0017	0.0033	0.0083	0.0167	0.0242
Angular acceleration, maximum ²⁾	α	rad/s ²	6800	5500	4000	3300	2700	2700
Filling capacity	V	L	0.4	0.7	1.0	1.6	2.2	3.0
Weight (without through drive) approx.	m	kg	12	15	21	33	45	60

1) The values are applicable:

- for an absolute pressure $p_{abs} = 1$ bar at suction port S
- within the optimum viscosity range from $\nu_{opt} = 16$ to 36 mm²/s
- for mineral-oil based hydraulic fluid.

2) The scope of application lies between the minimum necessary and the maximum permissible drive speeds.

Valid for external excitation (e.g. diesel engine 2- to 8-fold rotary frequency, cardan shaft 2-fold rotary frequency).

The limiting value is only valid for a single pump.

The loading capacity of the connecting parts must be taken into account.

Note

Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit. We recommend to check the loading through tests or calculation / simulation and comparison with the permissible values.

Determination of size

Flow	$q_v = \frac{V_g \cdot n \cdot \eta_v}{1000}$	[l/min]	V_g = Displacement per revolution in cm ³
Torque	$T = \frac{V_g \cdot \Delta p}{20 \cdot p \cdot h_{mh}}$	[Nm]	Δp = Differential pressure in bar
Power	$P = \frac{2\pi \cdot T \cdot n}{60000} = \frac{q_v \cdot \Delta p}{600 \cdot \eta_t}$ [kW]		n = Speed in rpm η_v = Volumetric efficiency η_{mh} = Mechanical-hydraulic efficiency η_t = Total efficiency ($\eta_t = \eta_v \cdot \eta_{mh}$)

Technical data, high-speed version

Table of values (theoretical values, without efficiencies and tolerances: values rounded)

Size	NG		45	71	100	140
Geometrical displacement per revolution	$V_{g \text{ max}}$ cm ³		45	71	100	140
Speed ¹⁾						
maximum at $V_{g \text{ max}}$	n_{nom} rpm		3000	2550	2300	2050
maximum at $V_g < V_{g \text{ max}}$	$n_{\text{max perm}}$ rpm		3300	2800	2500	2200
Flow						
at n_{nom} and $V_{g \text{ max}}$	$q_{v \text{ max}}$ l/min		135	178	230	287
Power at $\Delta p = 280$ bar						
at $n_{\text{nom}}, V_{g \text{ max}}$	P_{max} kW		63	83	107	134
Torque						
at $V_{g \text{ max}}$ and	$\Delta p = 280$ bar	T_{max} Nm	200	316	445	623
	$\Delta p = 100$ bar	T Nm	72	113	159	223
Rotary stiffness, drive shaft	S c Nm/rad		37500	71884	121142	169537
	R c Nm/rad		41025	76545	—	—
	P c Nm/rad		41232	80627	132335	188406
Moment of inertial rotary group	J_{TW} kgm ²		0.0033	0.0083	0.0167	0.0242
Angular acceleration, maximum ²⁾	α rad/s ²		4000	3300	2700	2700
Filling capacity	V L		1.0	1.6	2.2	3.0
Weight (without through drive) approx.	m kg		21	33	45	60

1) The values are applicable:

- for an absolute pressure $p_{\text{abs}} = 1$ bar at suction port S
- within the optimum viscosity range from $v_{\text{opt}} = 16$ to 36 mm²/s
- for mineral-oil based hydraulic fluid.

2) The scope of application lies between the minimum necessary and the maximum permissible drive speeds.

Valid for external excitation (e.g. diesel engine 2- to 8-fold rotary frequency, cardan shaft 2-fold rotary frequency).

The limiting value is only valid for a single pump.

The loading capacity of the connecting parts must be taken into account.

Note

Exceeding the maximum or falling below the minimum permissible values can lead to a loss of function, a reduction in operational service life or total destruction of the axial piston unit. We recommend to check the loading through tests or calculation / simulation and comparison with the permissible values.


Sizes 45, 71, 100 and 140 are optionally available in high-speed version.

External dimensions are not affected by this option.

Dimensions size 18

DFR, DFR1 – Pressure and flow control, hydraulic

Clockwise rotation

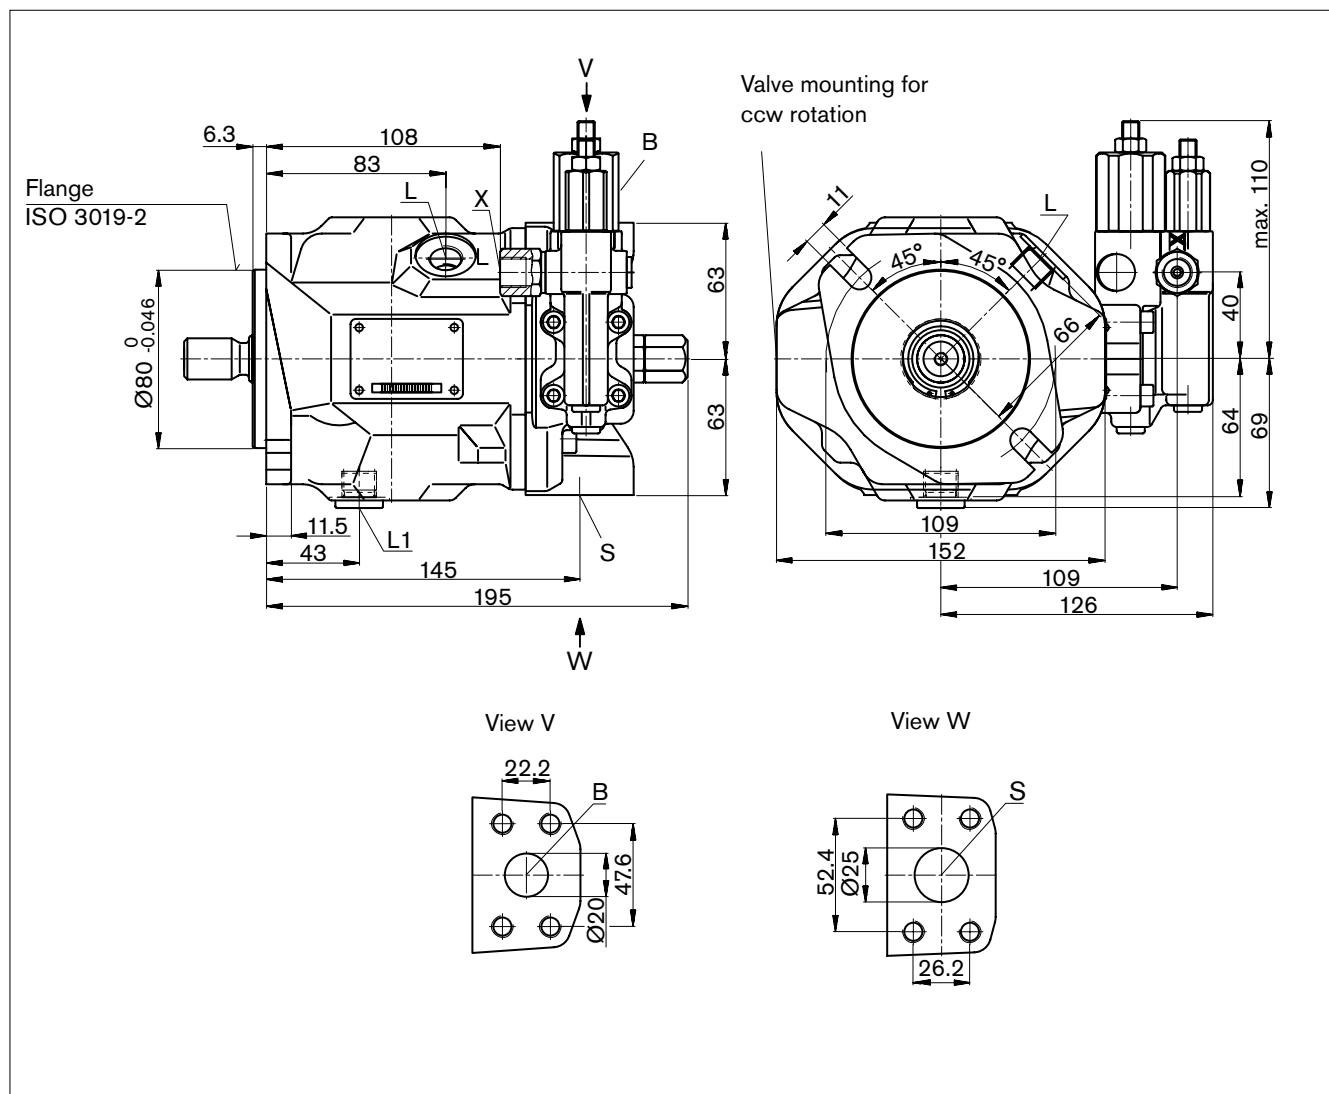




Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	3/4 in M10 x 1.5; 17 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	1 in M10 x 1.5; 17 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M16 x 1.5; 12 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M16 x 1.5; 12 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN ISO 228 ⁴⁾	G 1/4 in	350	O

Dimensions size 18

Before finalizing your design request a certified installation drawing. Dimensions in mm.

Drive shaft

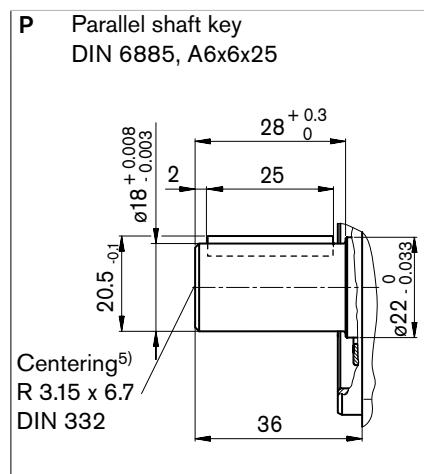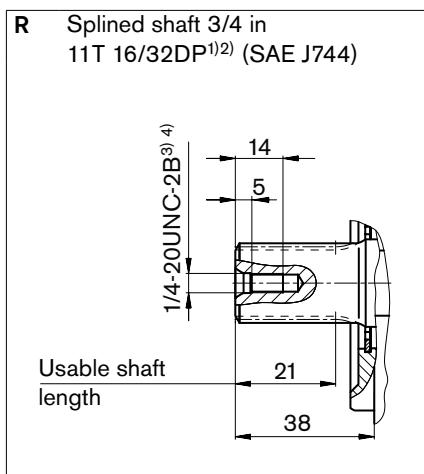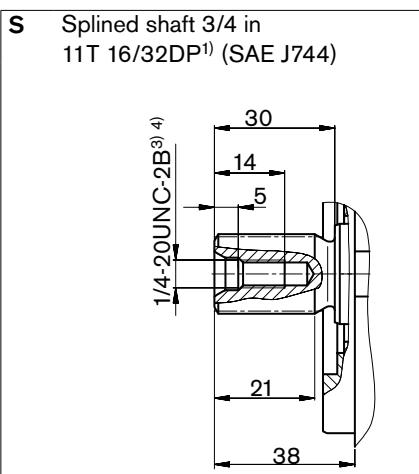

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5


2) Splines according to ANSI B92.1a, run out of spline is a deviation from standard

3) Thread according to ASME B1.1

Dimensions size 18


DG

Two-point control, directly operated

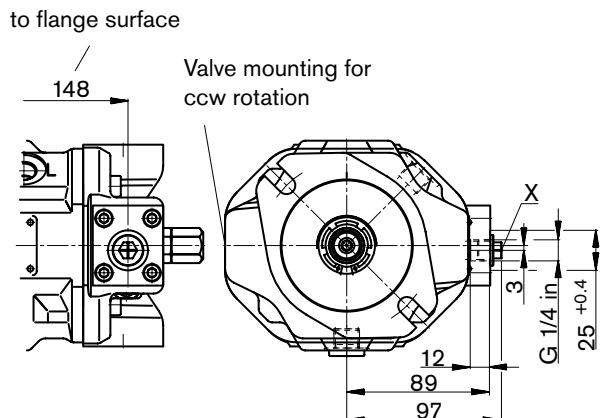


DR

Pressure control

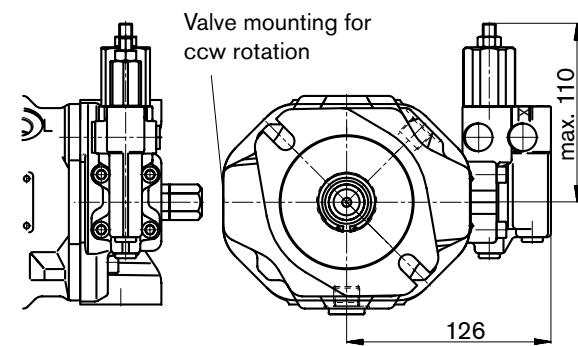


DRG

Pressure control, remotely operated

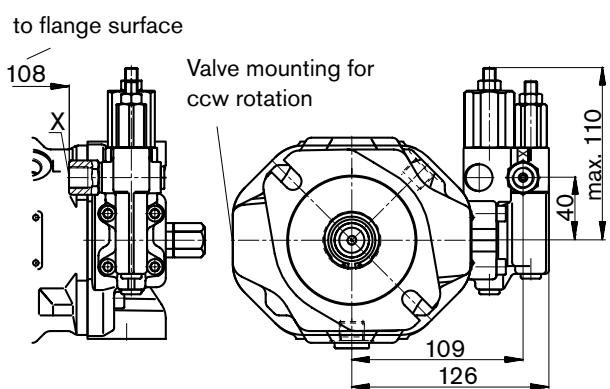

ED7., ER7.

Electro-hydraulic pressure control

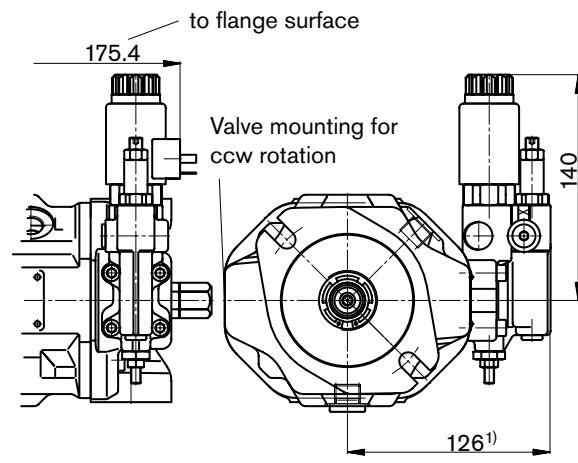


¹⁾ ER7.: 161 mm if using a sandwich plate pressure reducing valve.

Dimensions size 28

DFR/DFR1 – Pressure and flow control, hydraulic

Clockwise rotation

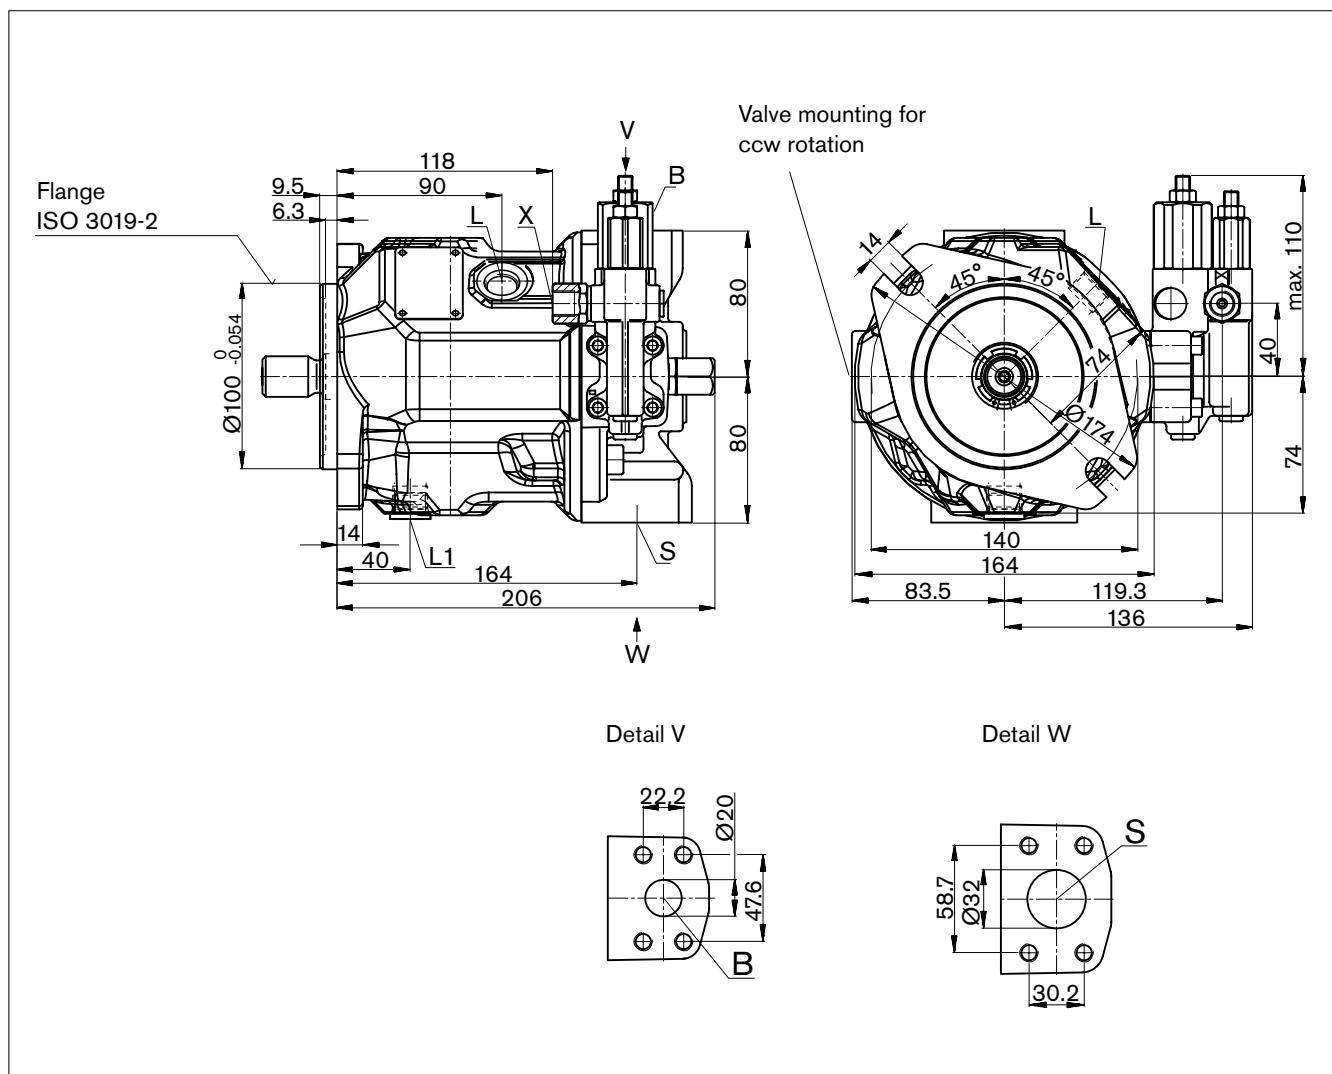


Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	3/4 in M10 x 1.5; 17 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	1 1/4 in M10 x 1.5; 17 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M18 x 1.5; 12 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M18 x 1.5; 12 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN ISO 228 ⁴⁾	G 1/4in; 12 deep	350	O

Dimensions size 28

Drive shaft

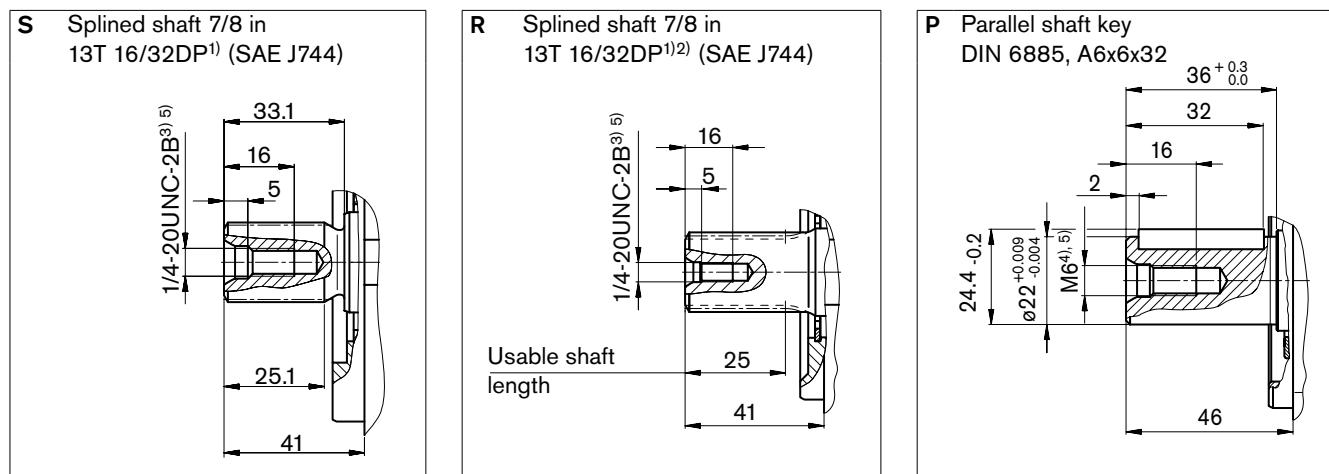


- 1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5
- 2) Spline according to ANSI B92.1a, run out of spline is a deviation from standard.
- 3) Thread according to ASME B1.1
- 4) Thread according to DIN 13

Dimensions size 28


DG

Two-point control, directly operated

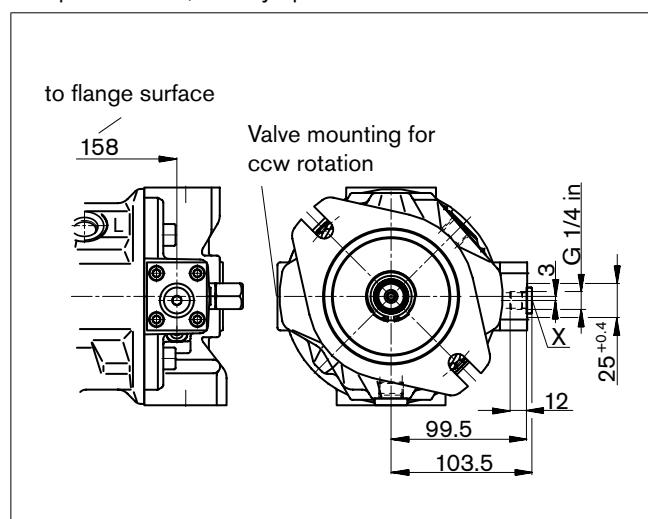


DFLR

Pressure, flow and power control

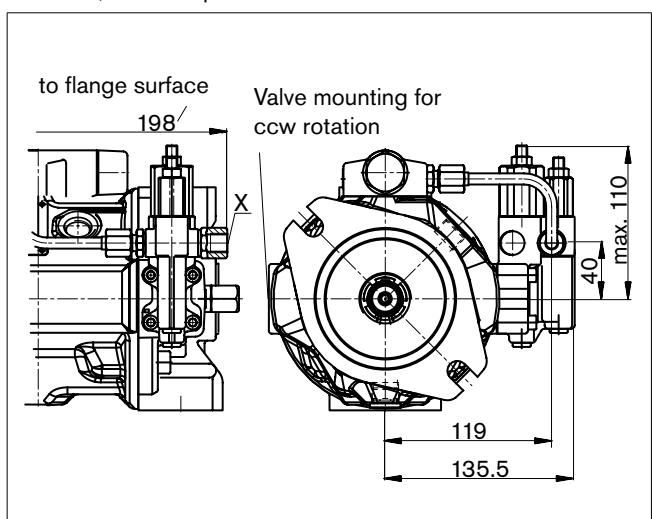


DR

Pressure control

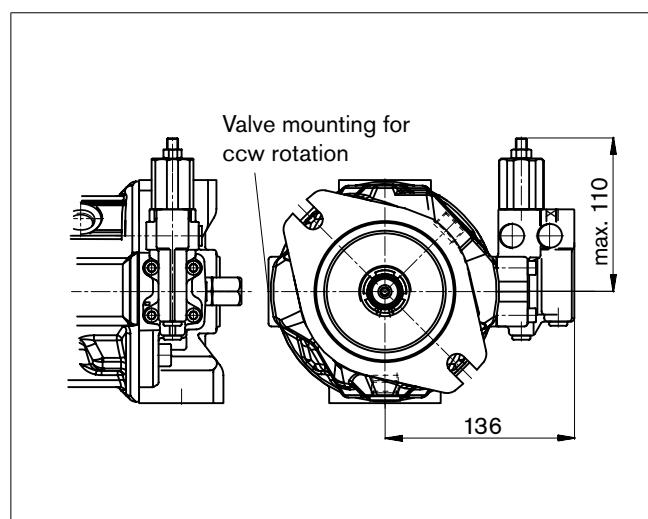


DRG

Pressure control, remotely operated

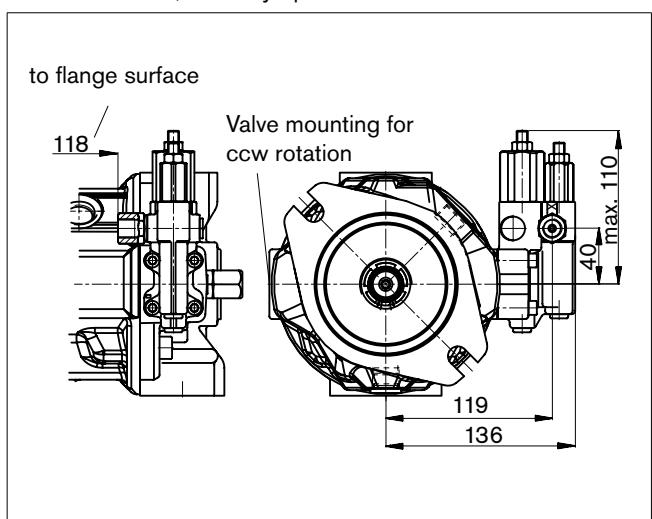

ED7. / ER7.

Electro-hydraulic pressure control

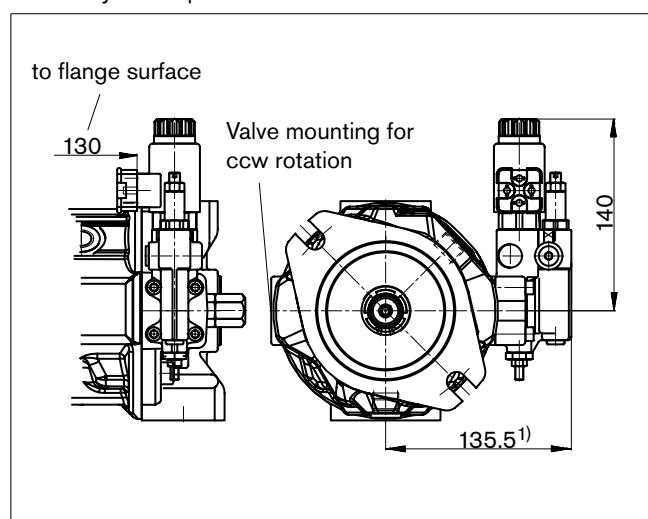


¹⁾ ER7.: 170.5 mm when using a sandwich plate pressure reducing valve.

Dimensions size 45

DFR/DFR1 – Pressure and flow control, hydraulic

Clockwise rotation

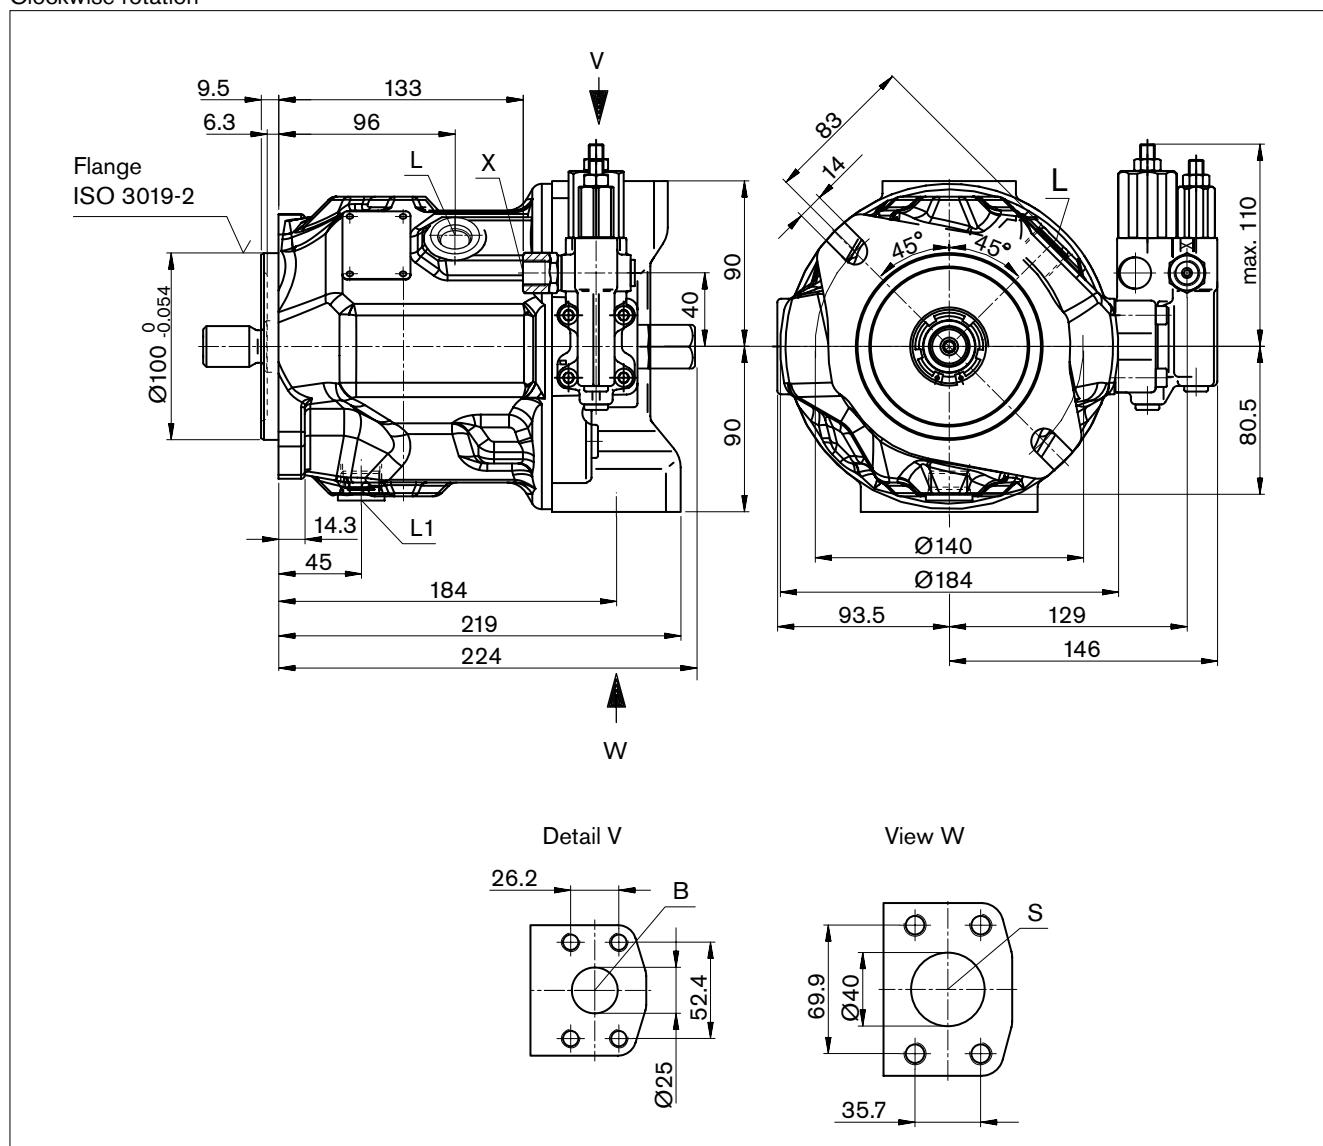


Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	1 in M10 x 1.5; 17 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	1 1/2 in M12 x 1.75; 20 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M22 x 1.5; 14 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M22 x 1.5; 14 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN ISO 228 ⁴⁾	G 1/4 in	350	O


Dimensions size 45

Drive shaft


S Splined shaft 1 in
15T 16/32DP¹⁾ (SAE J744)

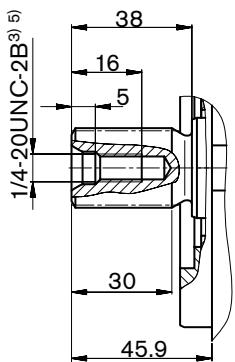

R Splined shaft 1 in
15T 16/32DP¹⁾²⁾ (SAE J744)

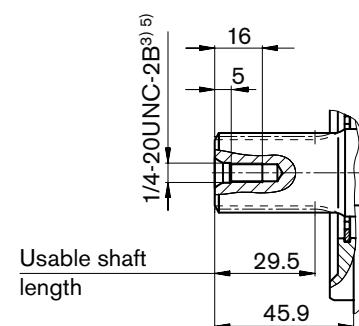

P Parallel shaft key
DIN 6885, A8x7x36

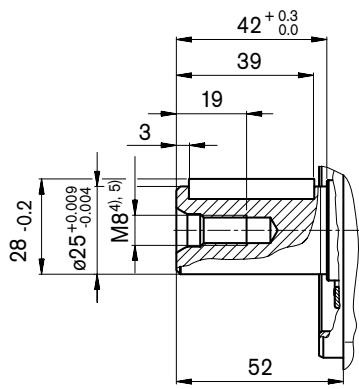


2) Spline according to ANSI B92.1a, run out of spline is a deviation from standard.

3) Thread according to ASME B1.1

4) Thread according to DIN 13


Dimensions size 45

DG Two-point control, directly operated

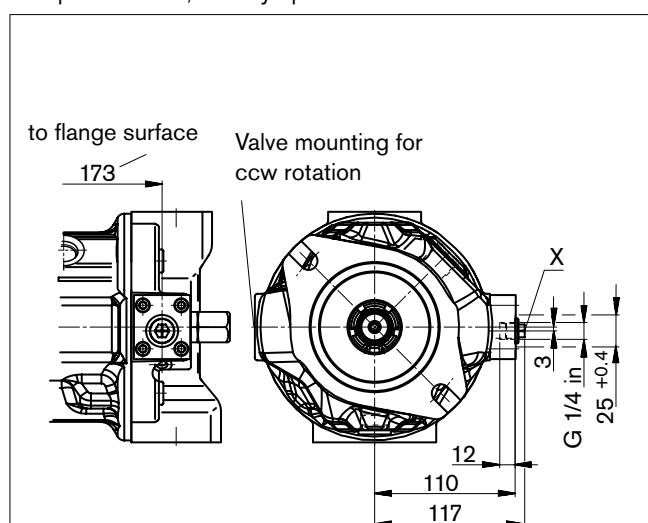


DFLR

Pressure, flow and power control

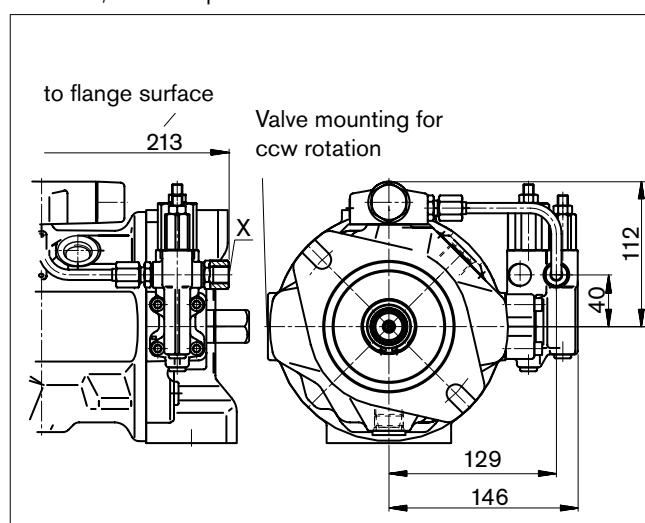


DR

Pressure control

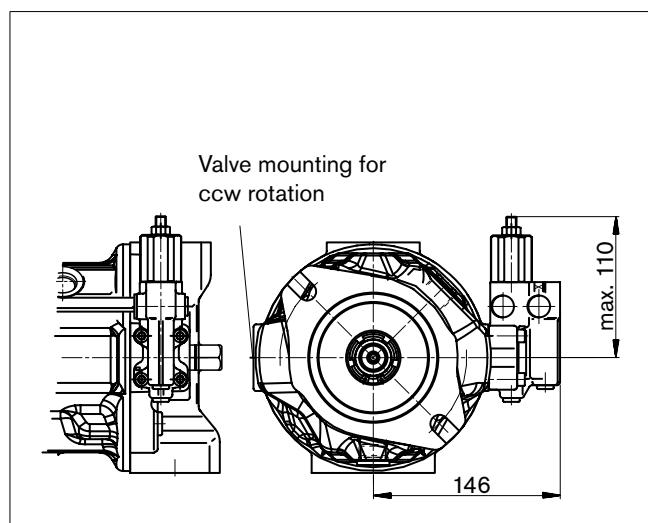



DRG

Pressure control, remotely operated

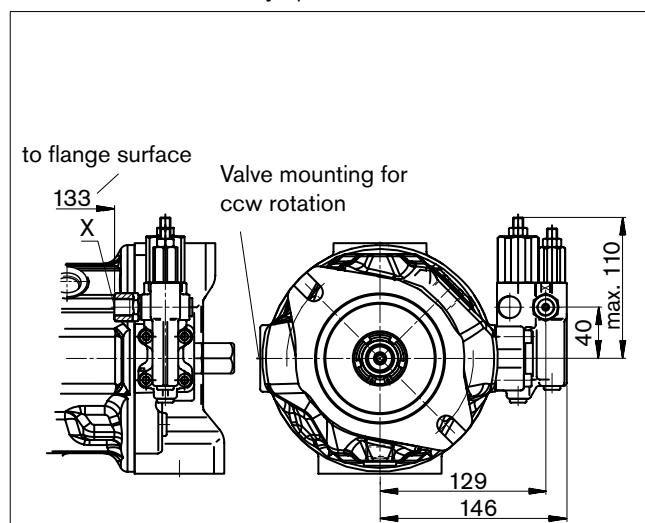

ED7. / ER7.

Electro-hydraulic pressure control

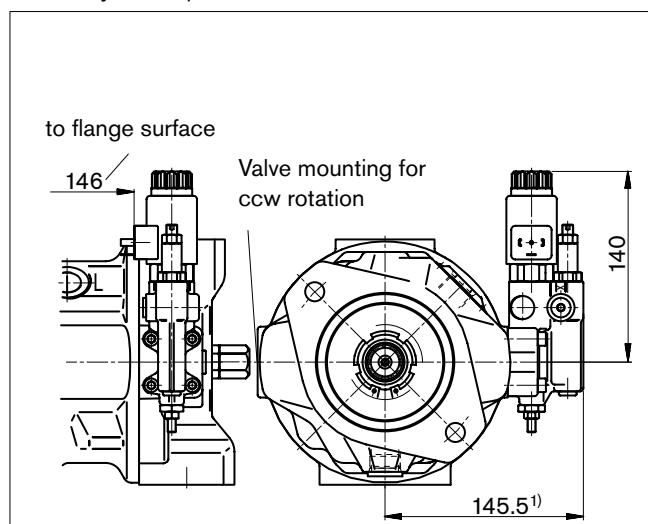


¹⁾ ER7.: 180.5 mm if using a sandwich plate pressure reducing valve.

Dimensions size 71

DFR/DFR1 – Pressure and flow control, hydraulic

Clockwise rotation

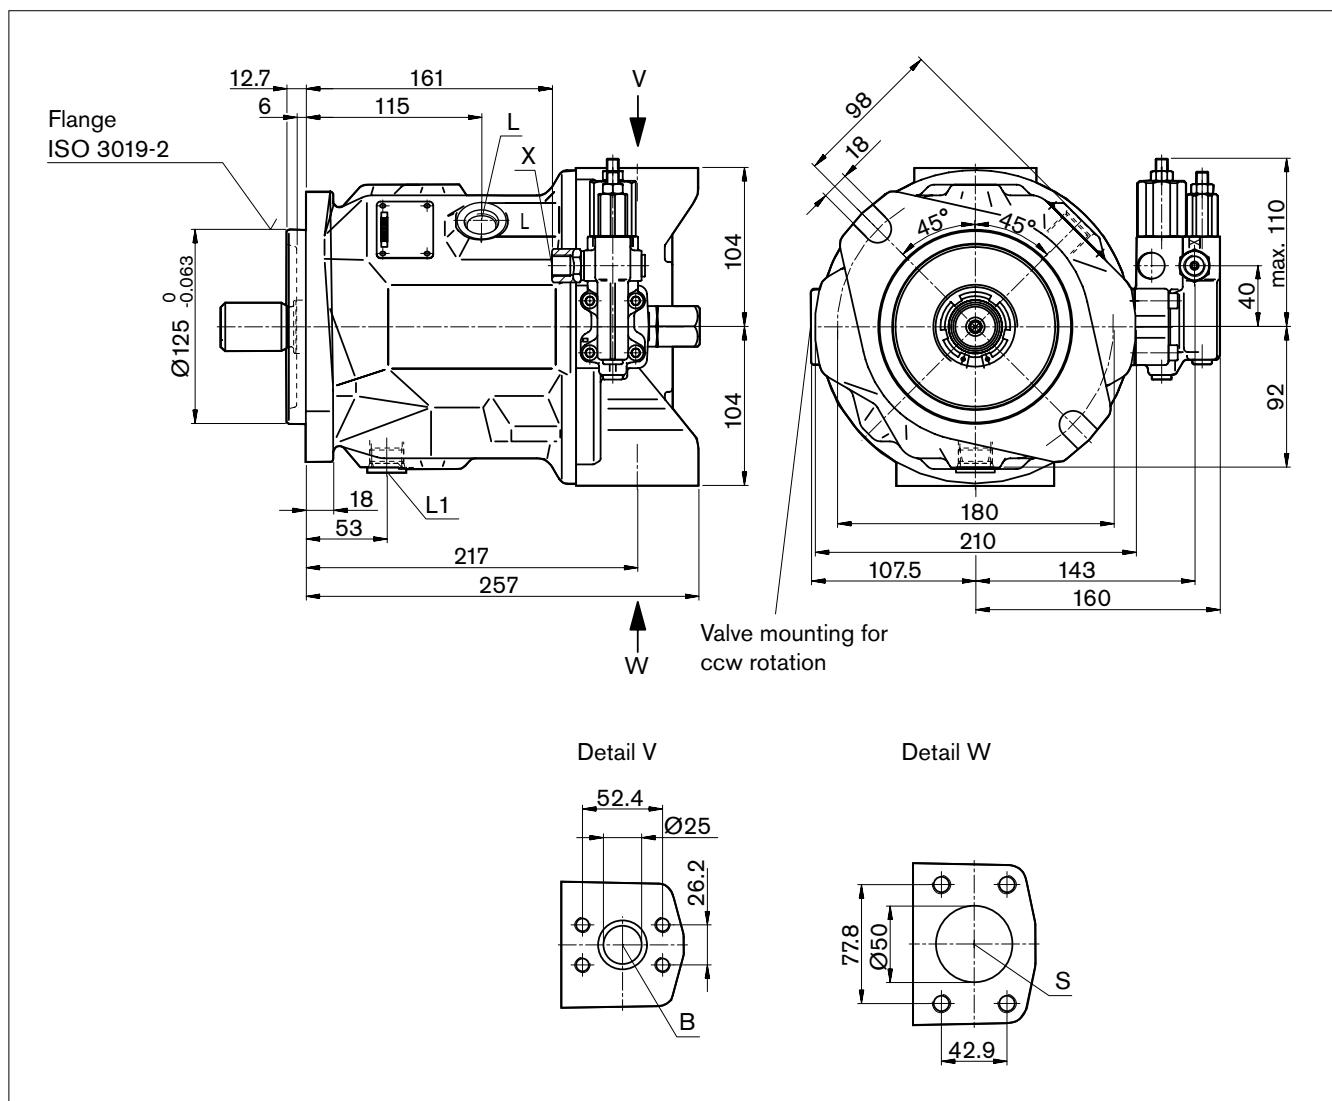


Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	1 in M10 x 1.5; 17 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	2 in M12 x 1.75; 20 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M22 x 1.5; 14 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M22 x 1.5; 14 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN ISO 228 ⁴⁾	G 1/4 in	350	O

Dimensions size 71

Drive shaft

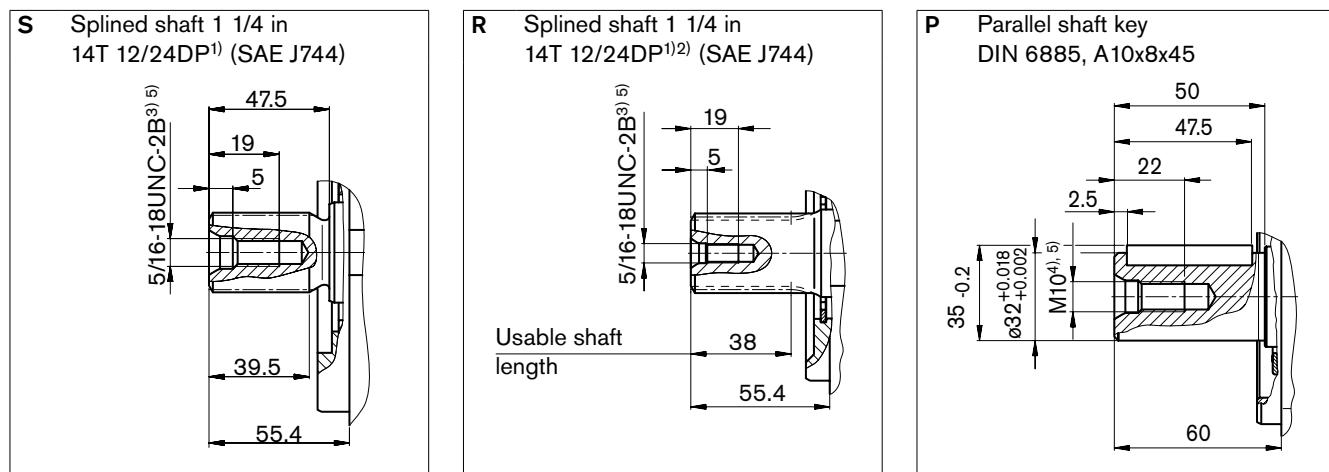

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5

2) Spline according to ANSI B92.1a, run out of spline is a deviation from standard.


3) Thread according to ASME B1.1

4) Thread according to DIN 13

Dimensions size 71


DG

Two-point control, directly operated

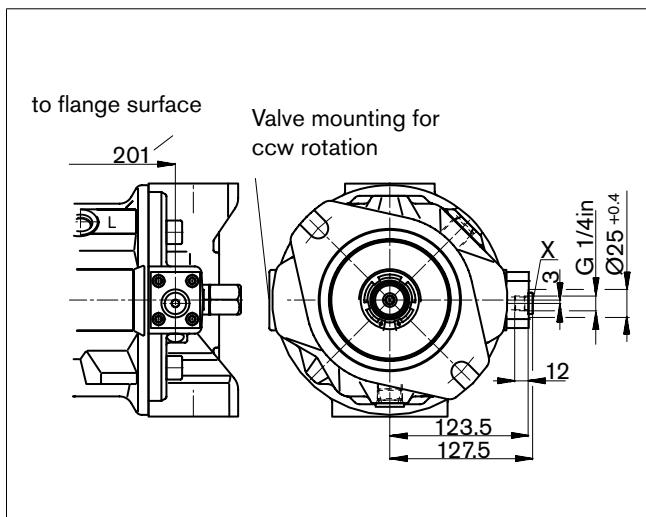


DFLR

Pressure, flow and power control

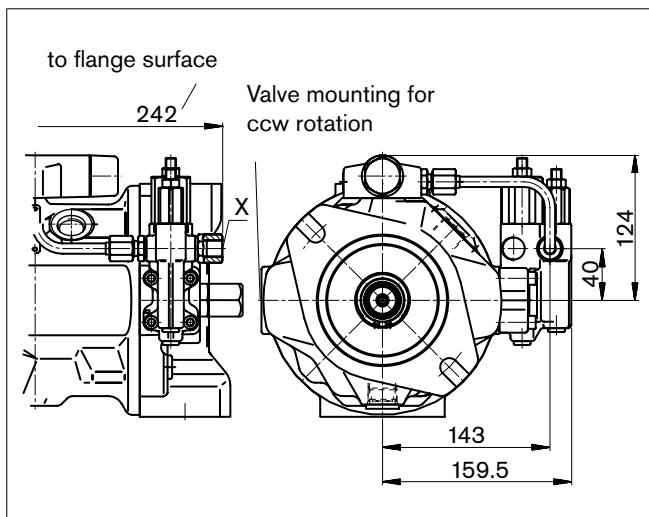


DR

Pressure control

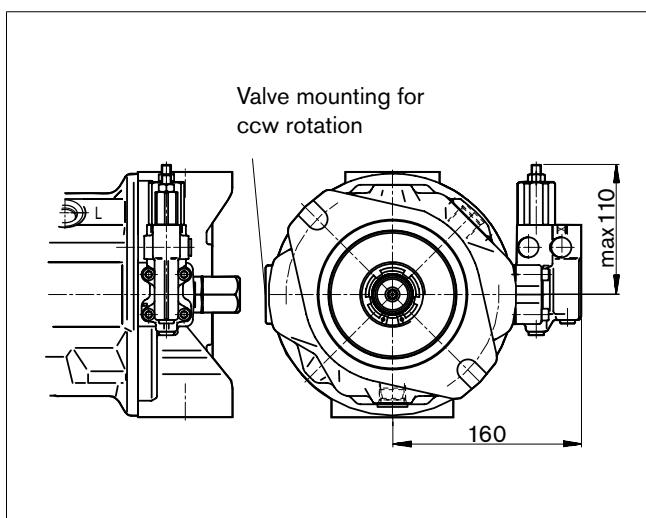


DRG

Pressure control, remotely operated

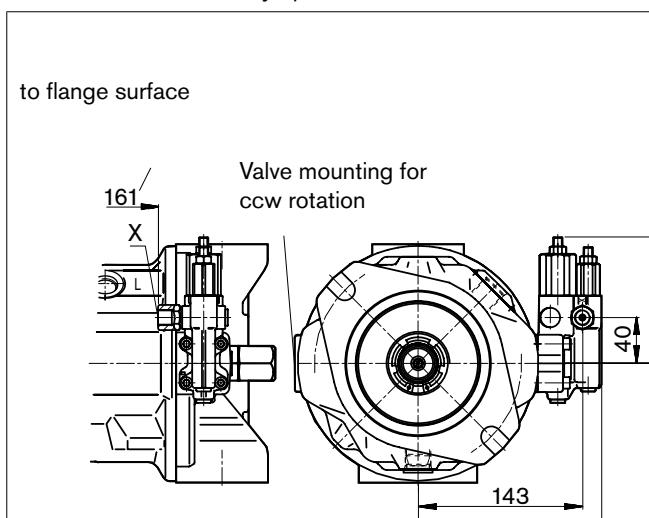

ED7. / ER7.

Electro-hydraulic pressure control

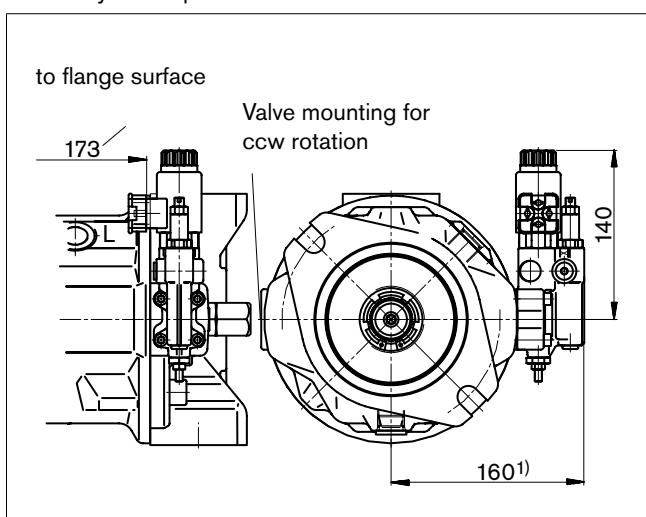


¹⁾ ER7.: 195 mm if using a sandwich plate pressure reducing valve.

Dimensions size 100

DFR/DFR1 – Pressure and flow control, hydraulic

Clockwise rotation


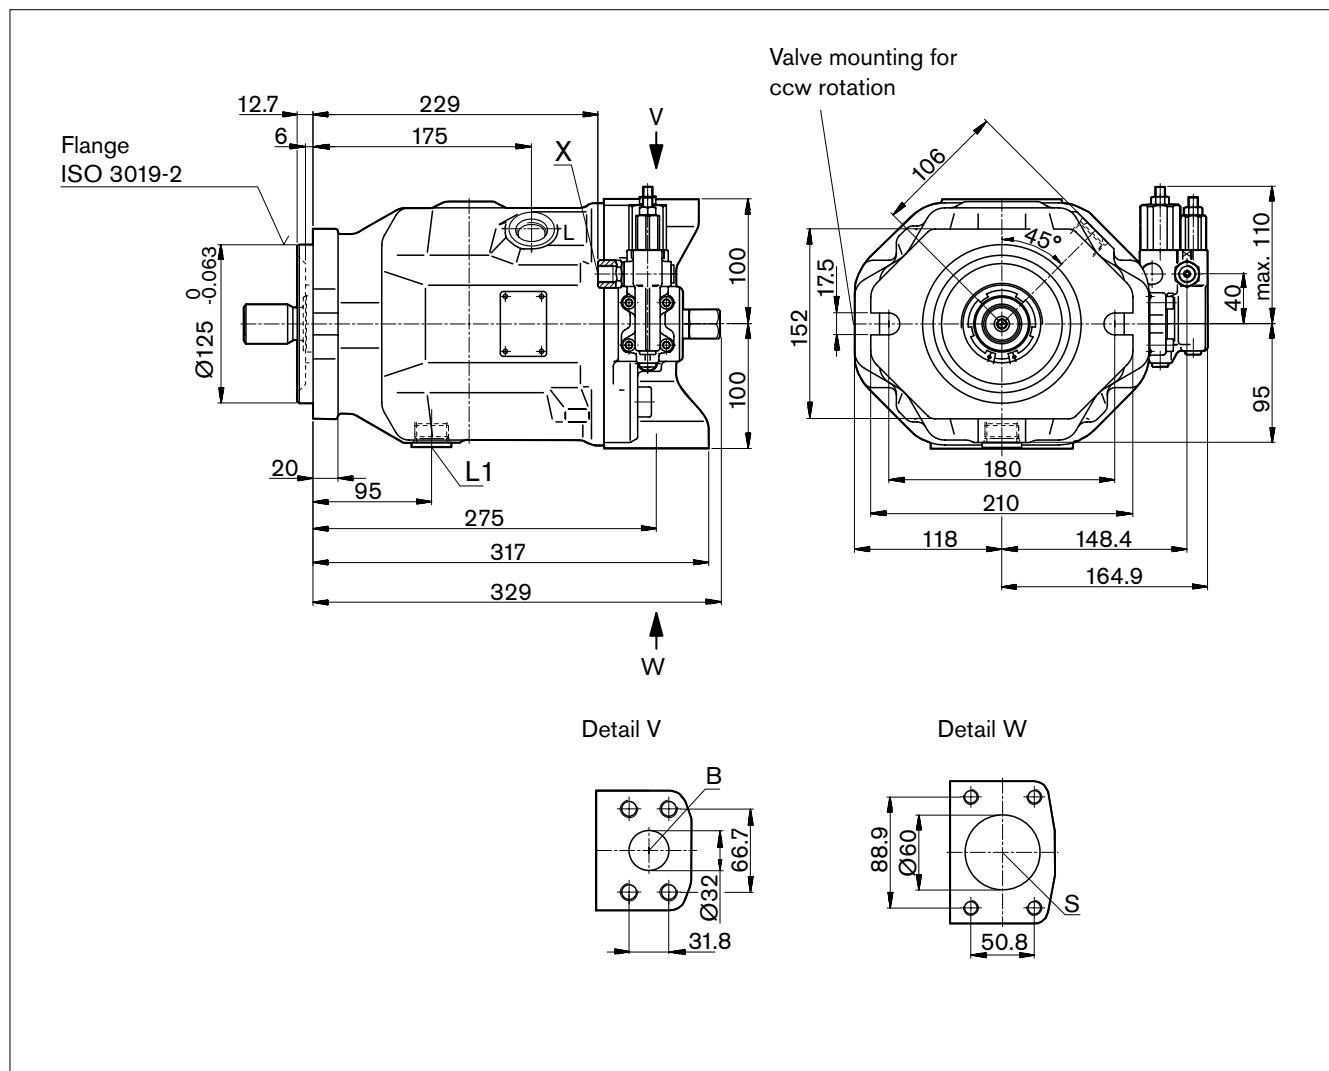


Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	1 1/4 in M14 x 2; 19 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	2 1/2 in M12 x 1.75; 17 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M27 x 2; 16 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M27 x 2; 16 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN ISO 228 ⁴⁾	G 1/4 in	350	O

Dimensions size 100


Drive shaft

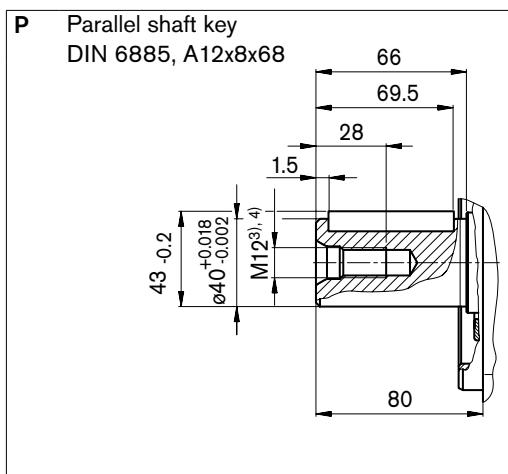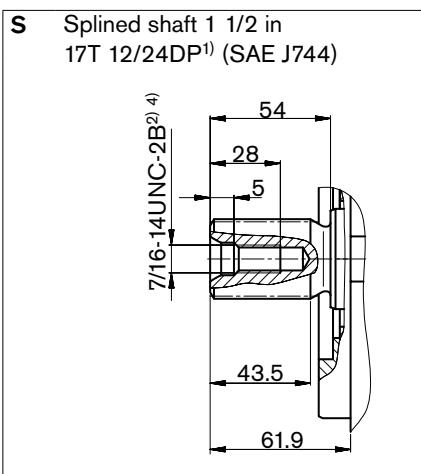

Dimensions size 100


DG

Two-point control, directly operated

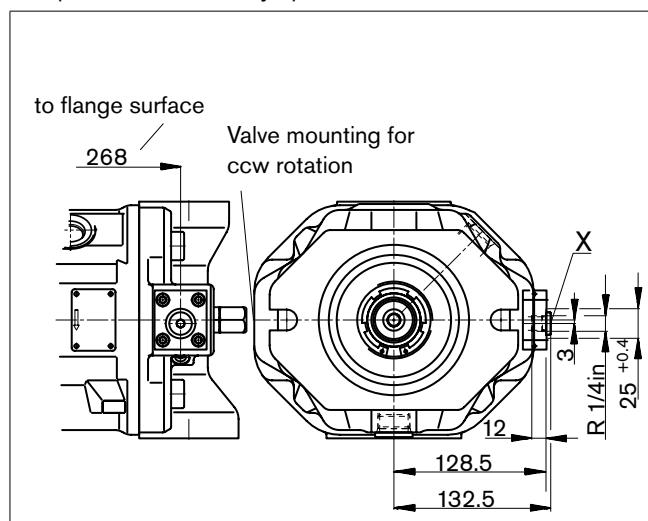


DFLR

Pressure, flow and power control

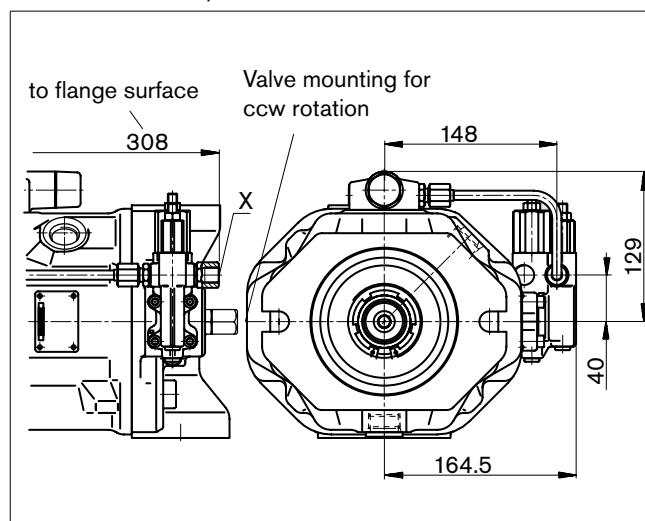


DR

Pressure control

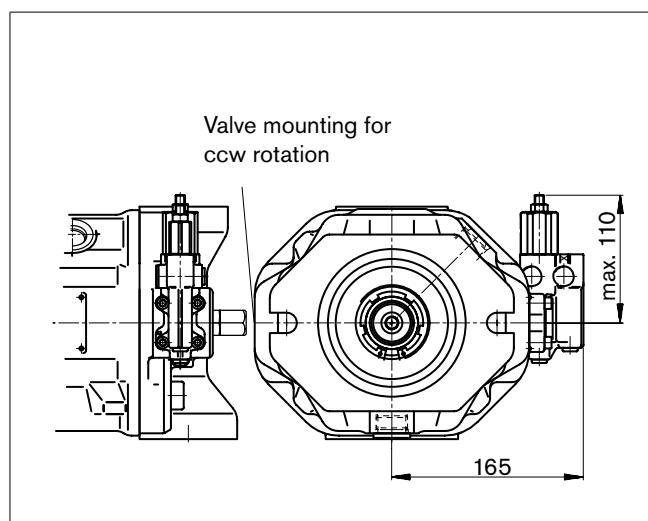



DRG

Pressure control, remotely operated

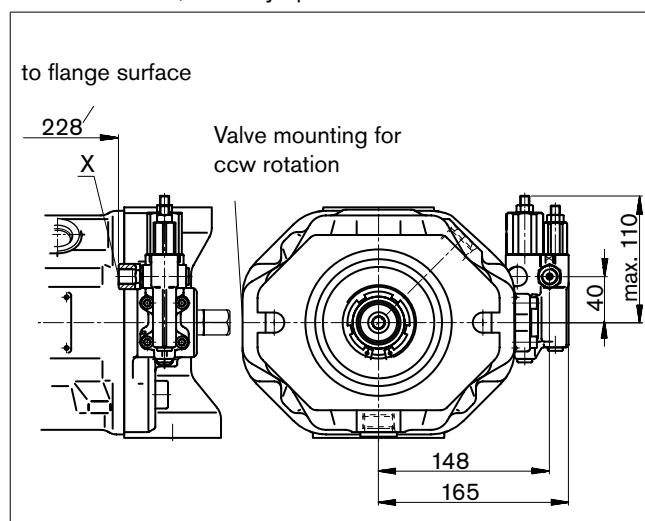

ED7. / ER7.

Electro-hydraulic pressure control

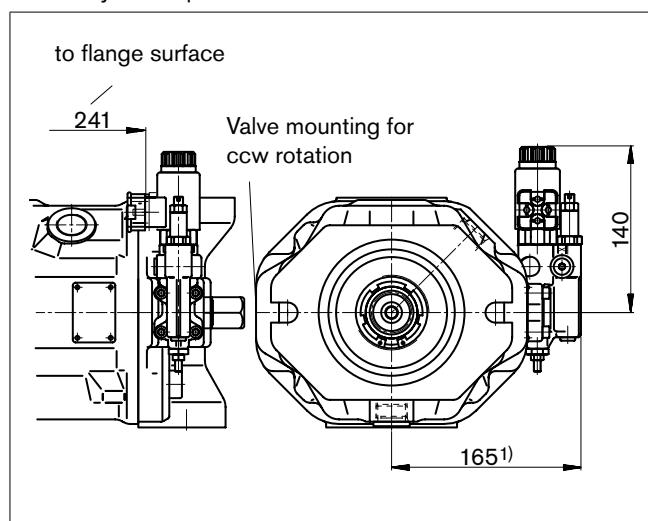


¹⁾ ER7.: 200 mm when using a sandwich plate pressure reducing valve.

Dimensions size 140

DFR/DFR1 – Pressure and flow control, hydraulic

Clockwise rotation


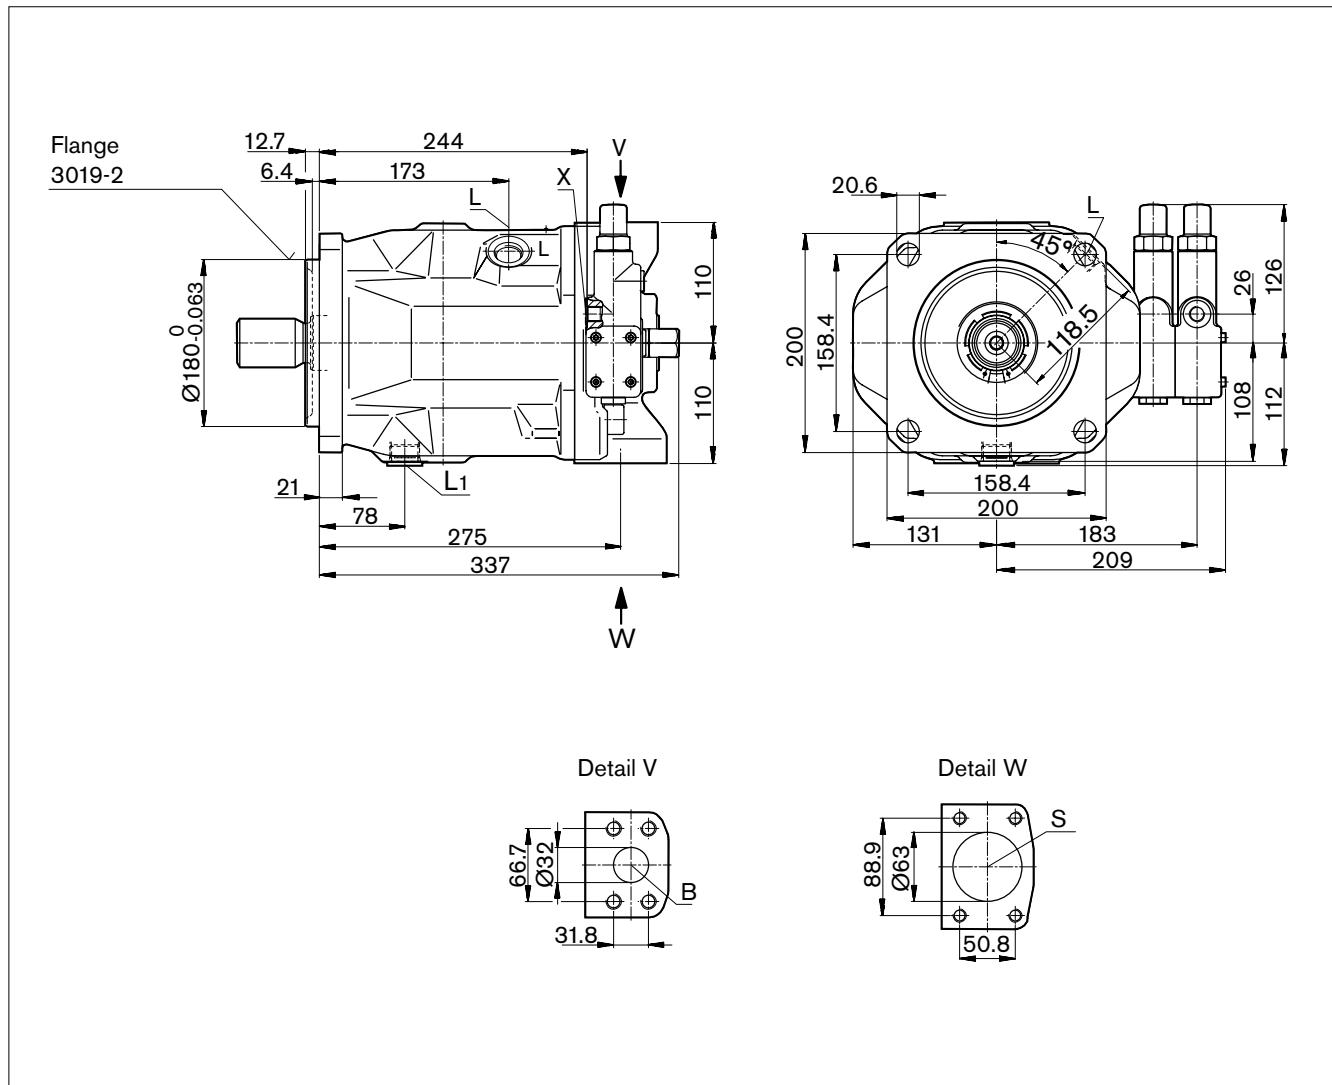


Ports

Designation	Port for	Standard	Size ¹⁾	Maximum pressure [bar] ²⁾	State
B	Service line, fastening thread	SAE J518 ³⁾ DIN 13	1 1/4 in M14 x 2; 19 deep	350	O
S	Suction line, fastening thread	SAE J518 ³⁾ DIN 13	2 1/2 in M12 x 1.75; 17 deep	10	O
L	Case drain fluid	DIN 3852 ⁴⁾	M27 x 2; 16 deep	2	O ⁵⁾
L ₁	Case drain fluid	DIN 3852 ⁴⁾	M27 x 2; 16 deep	2	X ⁵⁾
X	Pilot pressure	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
X	Pilot pressure with DG-control	DIN 3852 ⁴⁾	M14 x 1.5; 12 deep	350	O
M _H	Gauge port, high pressure	DIN 3852	M14 x 1.5, 12 deep	350	X

Dimensions size 140

Drive shaft

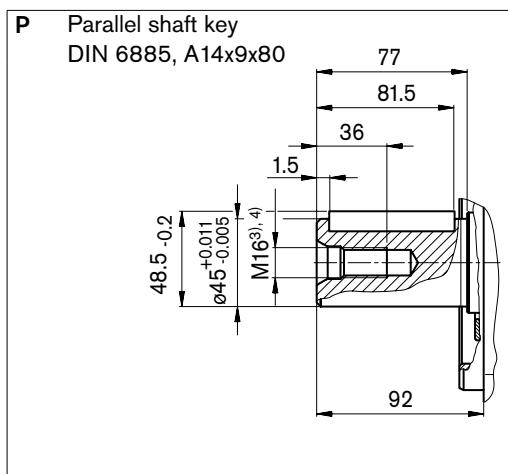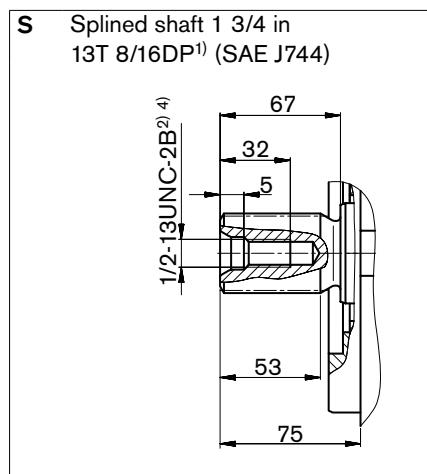

1) ANSI B92.1a, 30° pressure angle, flat root, side fit, tolerance class 5


2) Thread according to ASME B1.1

3) Thread according to DIN 13

Dimensions size 140


DG

Two-point control, directly operated

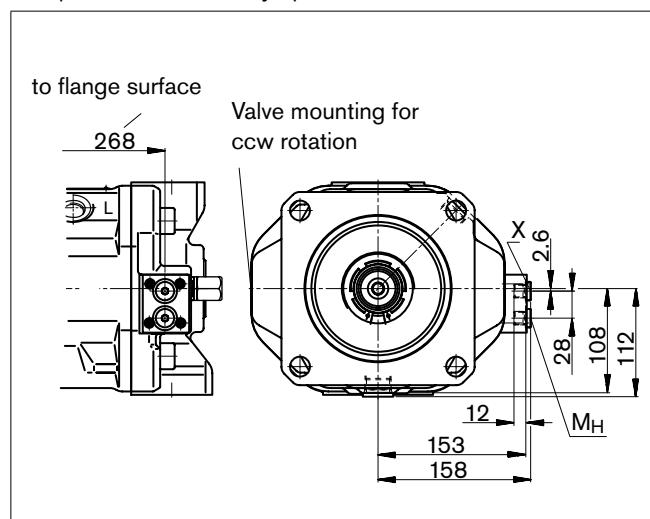


DFLR

Pressure, flow and power control

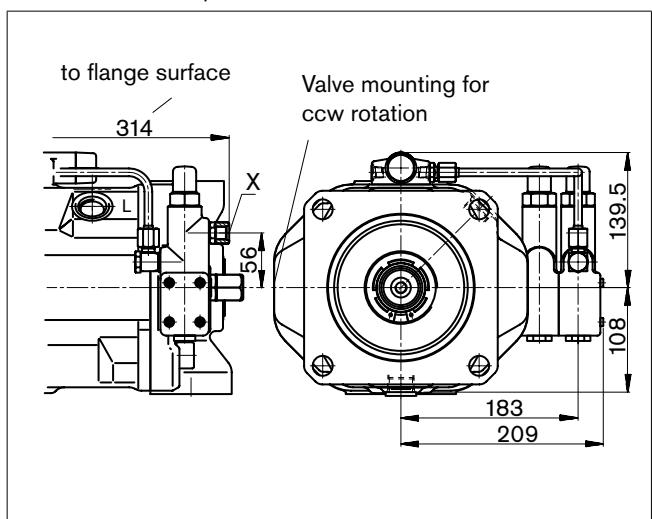


DR

Pressure control

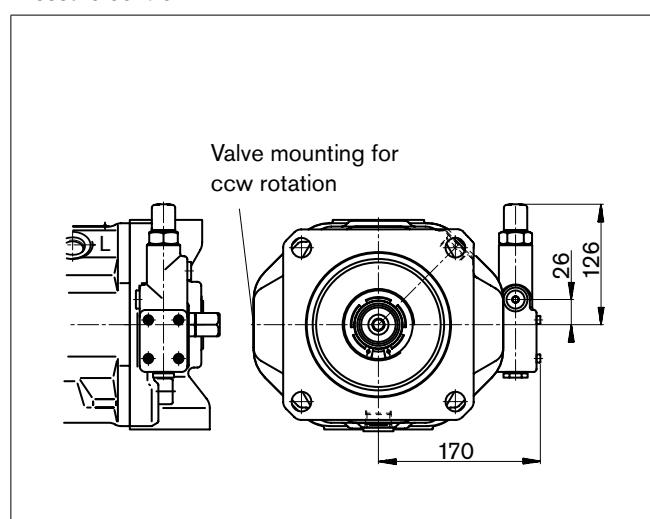


DRG

Pressure control, remotely operated

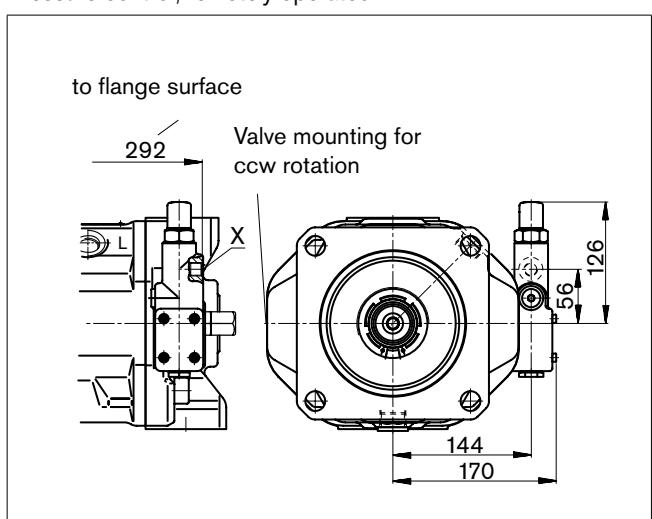

ED7. / ER7.

Electro-hydraulic pressure control

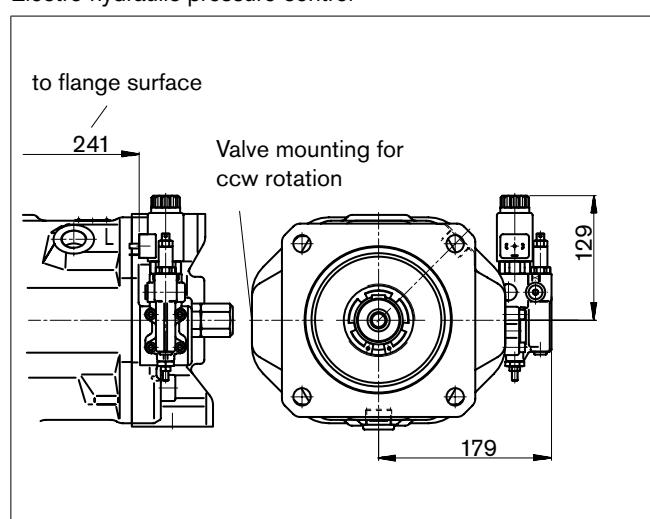


¹⁾ ER7.: 214 mm when using a sandwich plate pressure reducing valve.

Dimensions through drive

K01 flange ISO 3019-2 (SAE J744 - 82-2 (A))

Coupling for splined shaft according to ANSI B92.1a-1996

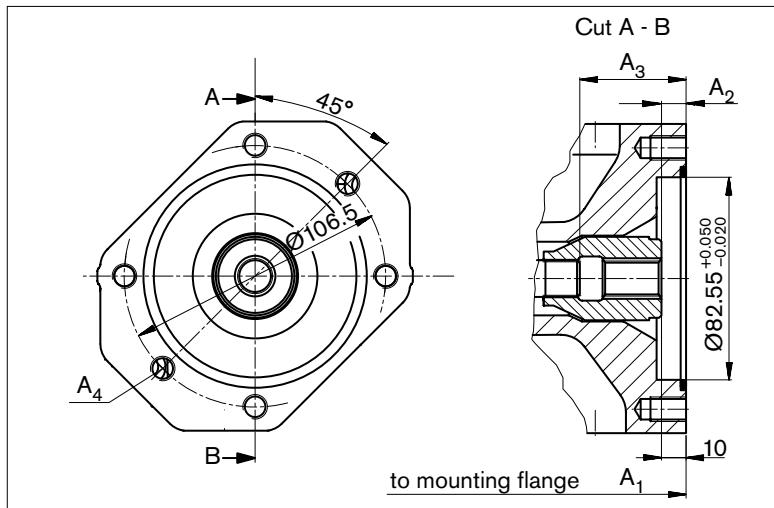


5/8 in 9T 16/32 DP¹⁾ (SAE J744 - 16-4 (A))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
18	182	10	43.3	M10 x 1.5, 14.5 deep
28	204	10	33.7	M10 x 1.5, 16 deep
45	229	10.7	53.4	M10 x 1.5, 16 deep
71	267	11.8	61.3	M10 x 1.5, 20 deep
100	338	10.5	65	M10 x 1.5, 16 deep
140	350	10.8	77.3	M10 x 1.5, 16 deep

K52 flange ISO 3019-2 (SAE J744 - 82-2 (A))

Coupling for splined shaft according to ANSI B92.1a-1996

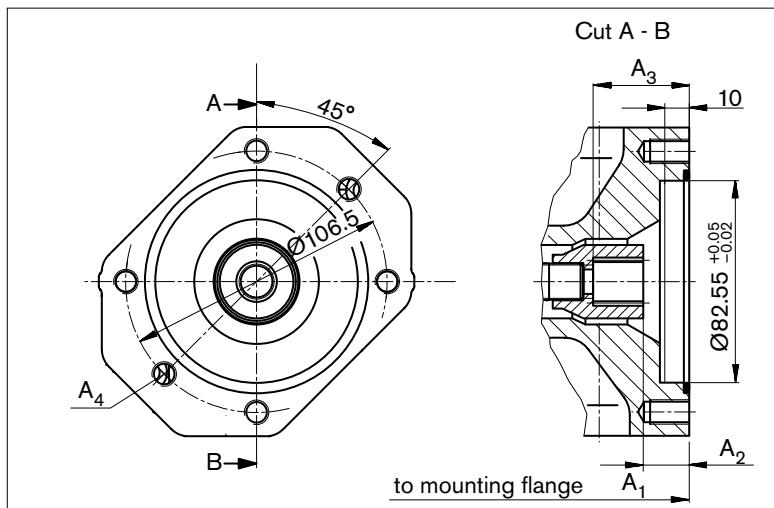


3/4 in 11T 16/32 DP¹⁾ (SAE J744 - 19-4 (A-B))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
18	182	18.8	38.7	M10 x 1.5, 14.5 deep
28	204	18.8	38.7	M10 x 1.5, 16 deep
45	229	18.9	38.7	M10 x 1.5, 16 deep
71	267	21.3	41.4	M10 x 1.5, 20 deep
100	338	19	38.9	M10 x 1.5, 16 deep
140	350	18.9	38.6	M10 x 1.5, 16 deep

K68 flange ISO 3019-2 (SAE J744 - 101-2 (B))

Coupling for splined shaft according to ANSI B92.1a-1996

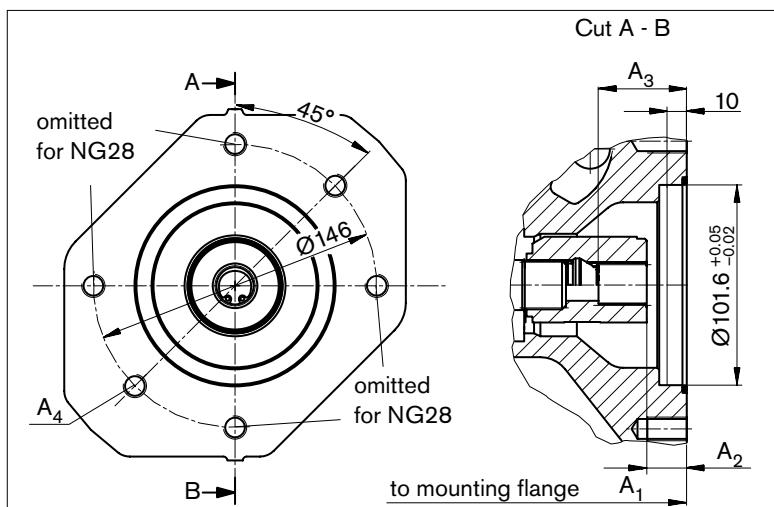


7/8 in 13T 16/32 DP¹⁾ (SAE J744 - 22-4 (B))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
28	204	17.8	41.7	M12 x 1.75, continuous
45	229	17.9	41.7	M12 x 1.75, 18 deep
71	267	20.3	44.1	M12 x 1.75, 20 deep
100	338	18	41.9	M12 x 1.75, 20 deep
140	350	17.8	41.6	M12 x 1.75, 20 deep

¹⁾ 30° pressure angle, flat root, side fit, tolerance class 5

Dimensions through drive


K04 flange ISO 3019-2 (SAE J744 - 101-2 (B))
Coupling for splined shaft according to ANSI B92.1a-1996

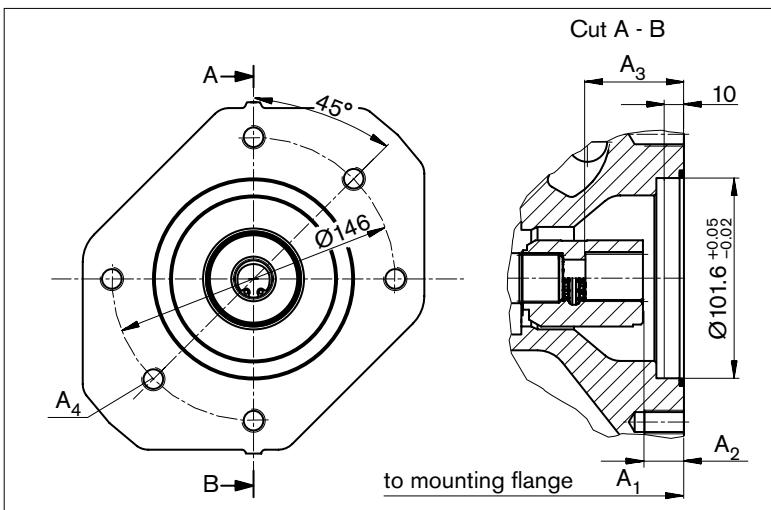

1 in 15T 16/32 DP¹⁾ (SAE J744 - 25-4 (B-B))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
45	229	18.4	46.7	M12 x 1.75, 18 deep
71	267	20.8	49.1	M12 x 1.75, 20 deep
100	338	18.2	46.6	M12 x 1.75, 20 deep
140	350	18.3	45.9	M12 x 1.75, 20 deep


K07 flange ISO 3019-2 (SAE J744 - 127-2 (C))
Coupling for splined shaft according to ANSI B92.1a-1996

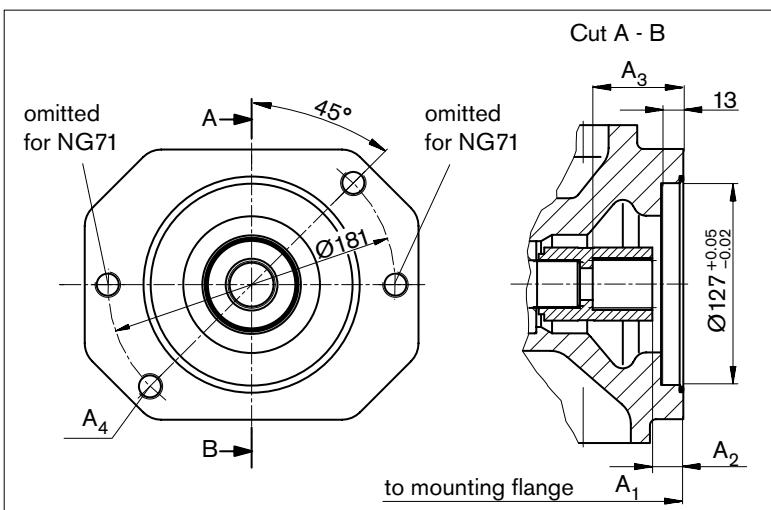

1 1/4 in 14T 12/24 DP¹⁾ (SAE J744 - 32-4 (C))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
71	267	21.8	58.6	M16 x 2, continuous
100	338	19.5	56.4	M16 x 2, continuous
140	350	19.3	56.1	M16 x 2, 24 deep

K24 flange ISO 3019-2 (SAE J744 - 127-2 (C))
Coupling for splined shaft according to ANSI B92.1a-1996

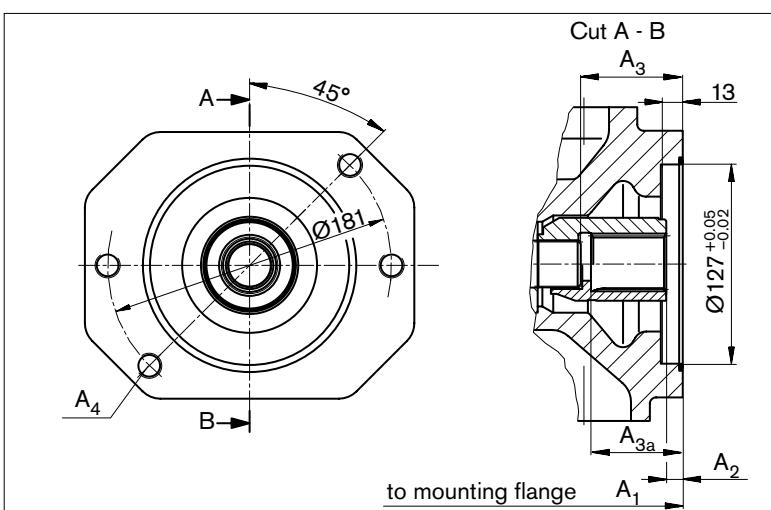

1 1/2 in 17T 12/24 DP¹⁾ (SAE J744 - 38-4 (C-C))


NG	A ₁	A ₂	A ₃ ³⁾	A _{3a} ⁴⁾	A ₄ ²⁾
100	338	10.5	65	-	M16 x 2, continuous
140	350	10.8	75	-	M16 x 2, 24 deep
	350	10.3	-	69.1	M16 x 2, 24 deep

¹⁾ 30° pressure angle, flat root, side fit, tolerance class 5

Dimensions through drive


K17 flange ISO 3019-2 (SAE J744 - 152-4 (A))
Coupling for splined shaft according to ANSI B92.1a-1996

1 3/4 in 13T 8/16 DP¹⁾ (SAE J744 - 44-4 (D))

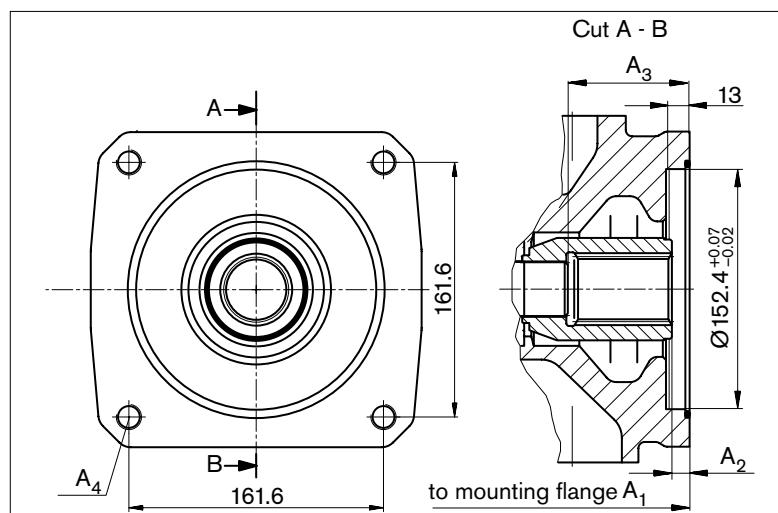

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
140	350	11	77.3	M6 x 2, continuous

K57 Metric 4-hole flange for mounting an R4 radial piston pump (see RE 11263)
Coupling for metric shaft key

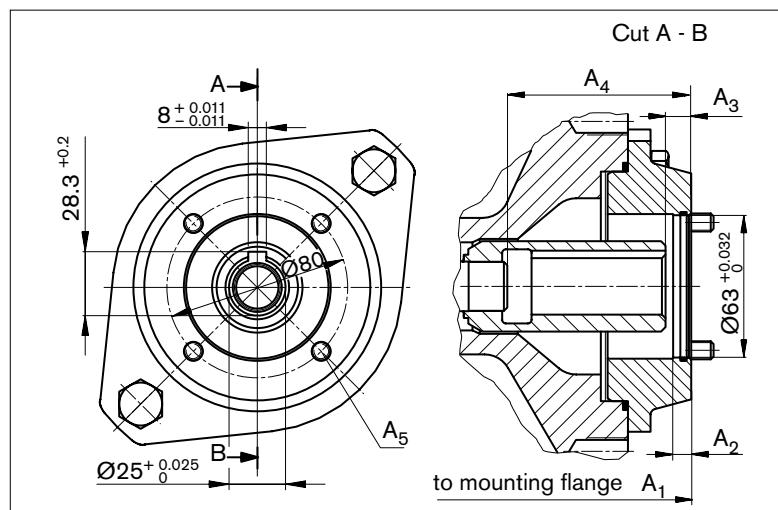


NG	A ₁	A ₂	A ₃	A ₄	A ₅ ³⁾
28	232	8	10.6	58.4	M8
45	257	8	11	81	M8
71	283	8	12.5	77	M10
100	354	8	10.5	81	M10
140	366	8	11	93	M8

Dimensions through drive

KB2 flange ISO 3019-2 - 80A2SW

Coupling for splined shaft according to ANSI B92.1a-1996

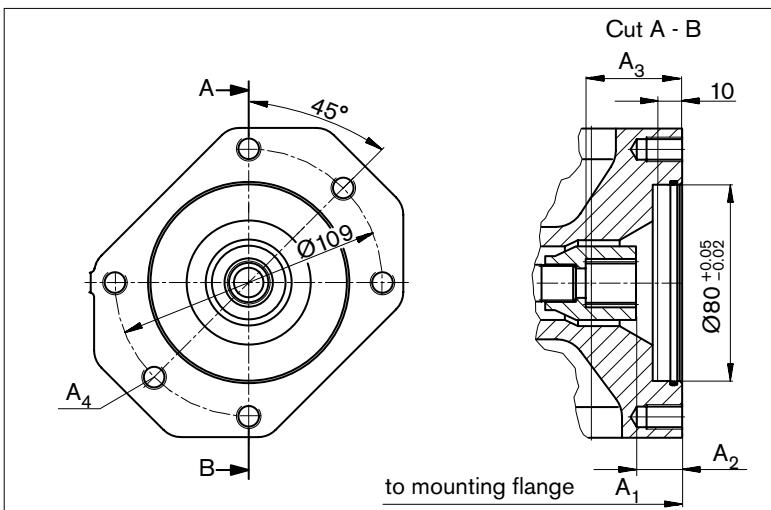


3/4 in 11T 16/32 DP¹⁾ (SAE J744 - 19-4 (A-B))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
18	182	18.8	38.7	M10 x 1.5, 14.5 deep
28	204	18.8	38.7	M10 x 1.5, 16 deep
45	229	18.9	38.7	M10 x 1.5, 16 deep
71	267	21.3	41.4	M10 x 1.5, 20 deep
100	338	19	38.9	M10 x 1.5, 20 deep
140	350	18.9	38.6	M10 x 1.5, 20 deep

KB3 flange ISO 3019-2 - 100A2SW

Coupling for splined shaft according to ANSI B92.1a-1996

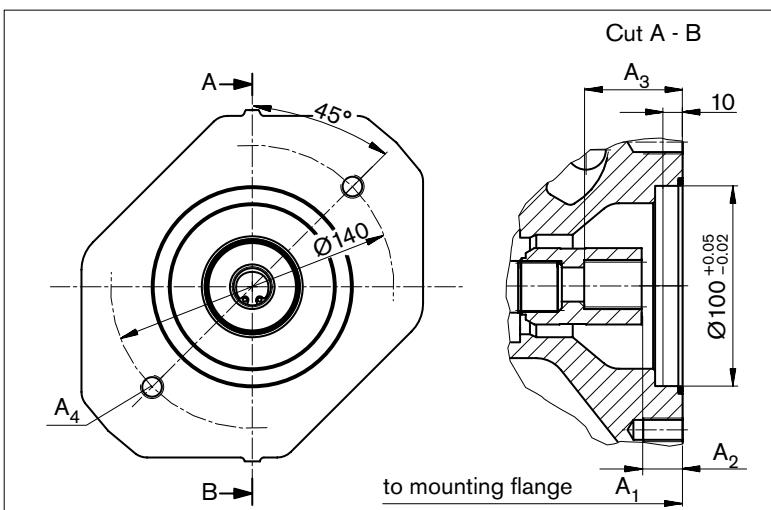


7/8 in 13T 16/32 DP¹⁾ (SAE J744 - 22-4 (B))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
28	204	17.8	41.7	M12 x 1.5, continuous
45	229	17.9	41.7	M12 x 1.5, continuous
71	267	20.3	44.1	M12 x 1.5, 20 deep
100	338	18	41.9	M12 x 1.5, 20 deep
140	350	17.8	41.6	M12 x 1.5, 20 deep

KB4 flange ISO 3019-2 - 100A2SW

Coupling for splined shaft according to ANSI B92.1a-1996

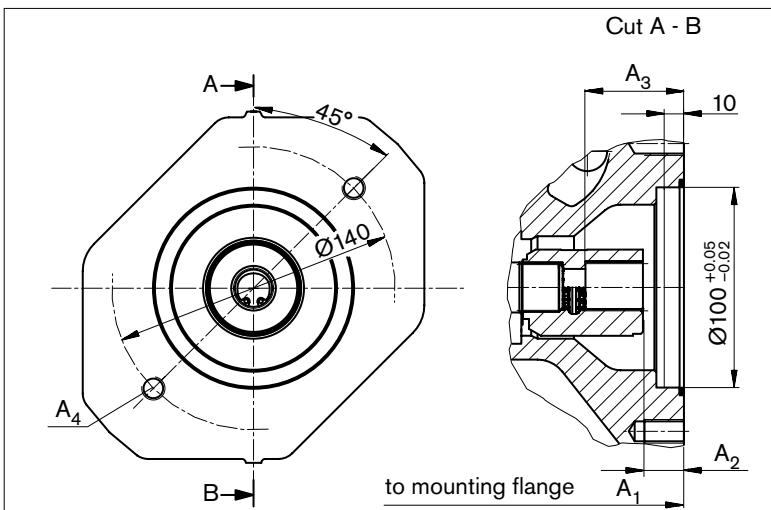

1 in 15T 16/32 DP¹⁾ (SAE J744 - 25-4 (B-B))


NG	A ₁	A ₂	A ₃	A ₄ ²⁾
45	229	18.4	46.7	M12 x 1.75, continuous
71	267	20.8	49.1	M12 x 1.75, 20 deep
100	338	18.2	46.6	M12 x 1.75, 20 deep
140	350	18.3	45.9	M12 x 1.75, 20 deep

1) 30° pressure angle, flat root, side fit, tolerance class 5

Dimensions through drive

KB5 flange ISO 3019-2 - 125A2SW

Coupling for splined shaft according to ANSI B92.1a-1996

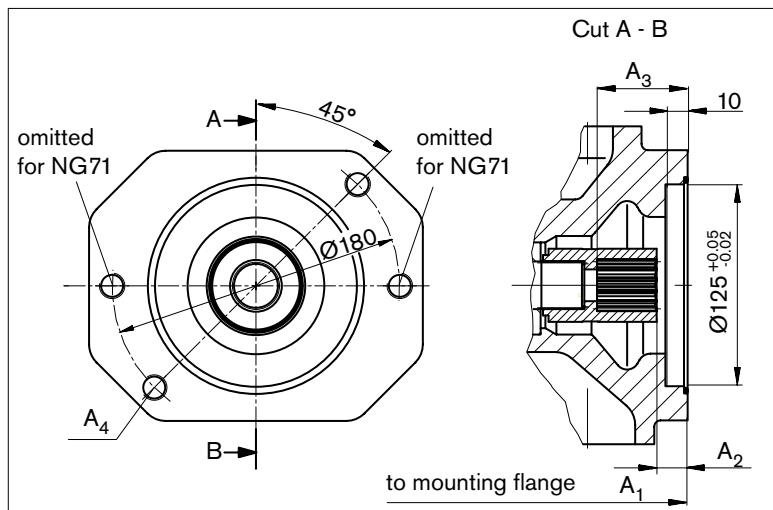


1 1/4 in 14T 12/24 DP¹⁾ (SAE J744 - 32-4 (C))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
71	267	21.8	58.6	M16 x 2, continuous
100	338	19.5	56.4	M16 x 2, continuous
140	350	19.3	56.1	M16 x 2, 24 deep

KB6 flange ISO 3019-2 - 125A2SW

Coupling for splined shaft according to ANSI B92.1a-1996

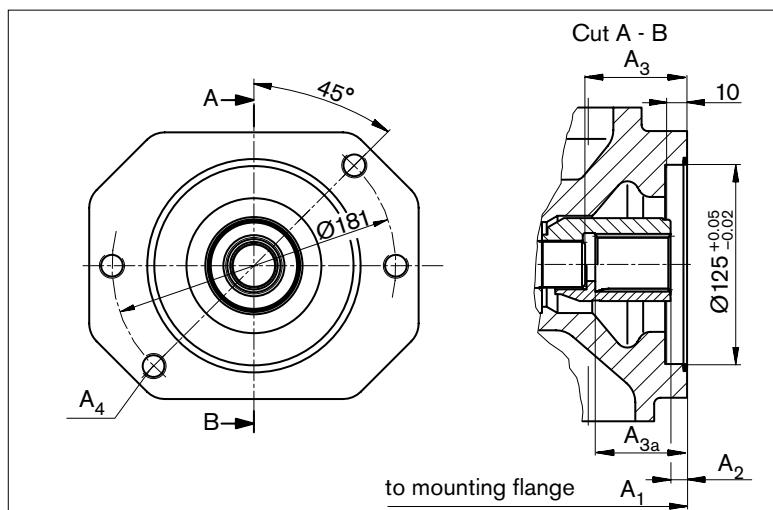


1 1/2 in 17T 12/24 DP¹⁾ (SAE J744 - 38-4 (C-C))

NG	A ₁	A ₂	A ₃ ³⁾	A _{3a} ⁴⁾	A ₄ ²⁾
100	338	10.5	65	-	M16 x 2, continuous
140	350	10.8	75	-	M16 x 2, 24 deep
	350	10.3	-	69.1	M16 x 2, 24 deep

KB7 flange ISO 3019-2 - 180B4HW

Coupling for splined shaft according to ANSI B92.1a-1996

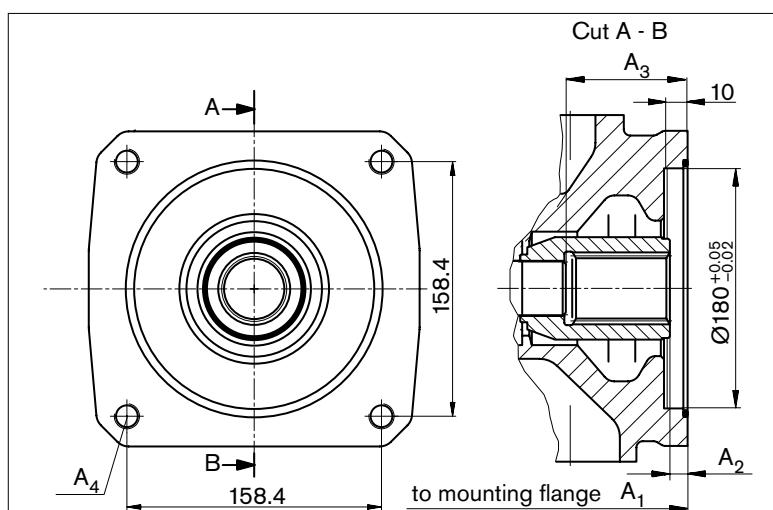

1 3/4 in 13T 8/16 DP¹⁾ (SAE J744 - 44-4 (D))

NG	A ₁	A ₂	A ₃	A ₄ ²⁾
140	350	11.3	77.3	M16 x 2, continuous

¹⁾ 30° pressure angle, flat root, side fit, tolerance class 5